

SENSITIVITY ANALYSIS OF TEMPERATURE FIELD WITH RESPECT TO THE RADIUS OF INTERNAL HOLE

Ewa Majchrzak^{1,2}, Grażyna Kałuża¹, Marek Paruch¹

¹ Silesian University of Technology, Gliwice

² Czestochowa University of Technology, Czestochowa

Abstract. The domain (2D problem) with internal hole of radius R is considered. The temperature field in this domain is described by the Laplace equation supplemented by adequate boundary conditions. The aim of investigations is to estimate the changes of temperature due to change of radius R . In order to solve the problem, the boundary element method is used and the implicit differentiation method of sensitivity analysis is applied. In the final part of the paper the example of numerical computations is shown.

1. Boundary element method

The steady state temperature field $T(x, y)$ in domain Ω (Fig. 1) is described by the Laplace equation

$$(x, y) \in \Omega : \nabla^2 T(x, y) = 0 \quad (1)$$

supplemented by adequate boundary conditions.

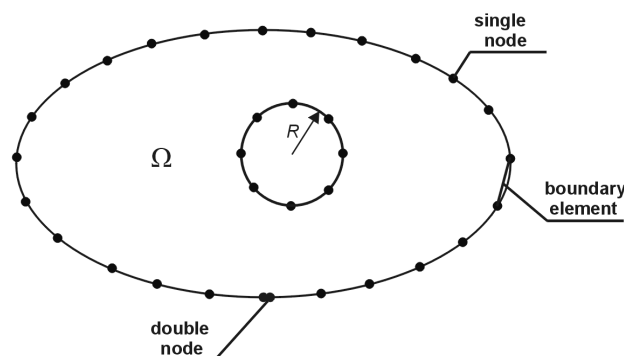


Fig. 1. Domain considered

Application of the boundary element method [1, 2] leads to the following system of equations

$$\mathbf{G} \mathbf{q} = \mathbf{H} \mathbf{T} \quad (2)$$

where vectors \mathbf{T} and \mathbf{q} contain the values of temperatures T_r and heat fluxes q_r at the boundary nodes (x_r, y_r) , $r = 1, 2, \dots, R$, \mathbf{G} and \mathbf{H} are the influence matrices. If the linear boundary elements are used then for the single node r being the end of the boundary element Γ_j and being the beginning of the boundary element Γ_{j+1} we have:

$$\begin{aligned} G_{ir} &= G_{ij}^k + G_{ij+1}^p \\ \hat{H}_{ir} &= \hat{H}_{ij}^k + \hat{H}_{ij+1}^p \end{aligned} \quad (3)$$

while for double node $r, r + 1$:

$$\begin{aligned} G_{ir} &= G_{ij}^k, \quad G_{ir+1} = G_{ij+1}^p \\ \hat{H}_{ir} &= \hat{H}_{ij}^k, \quad \hat{H}_{ir+1} = \hat{H}_{ij+1}^p \end{aligned} \quad (4)$$

The elements of matrices are calculated using the formulas:

$$G_{ij}^p = \frac{l_j}{4\pi\lambda} \int_{-1}^1 N_p \ln \frac{1}{r_{ij}} d\theta \quad (5)$$

$$G_{ij}^k = \frac{l_j}{4\pi\lambda} \int_{-1}^1 N_k \ln \frac{1}{r_{ij}} d\theta \quad (6)$$

and:

$$\hat{H}_{ij}^p = \frac{1}{4\pi} \int_{-1}^1 N_p \frac{r_x^j l_y^j - r_y^j l_x^j}{r_{ij}^2} d\theta \quad (7)$$

$$\hat{H}_{ij}^k = \frac{1}{4\pi} \int_{-1}^1 N_k \frac{r_x^j l_y^j - r_y^j l_x^j}{r_{ij}^2} d\theta \quad (8)$$

where:

$$N_p = \frac{1-\theta}{2}, \quad N_k = \frac{1+\theta}{2} \quad (9)$$

are the shape functions ($\theta \in [-1, 1]$), l_j is the length of the boundary element Γ_j

$$l_j = \sqrt{(l_x^j)^2 + (l_y^j)^2} \quad (10)$$

where:

$$\begin{aligned} l_x^j &= x_k^j - x_p^j \\ l_y^j &= y_k^j - y_p^j \end{aligned} \quad (11)$$

In equations (5), (6), (7), (8) r_{ij} is the distance between the observation point (ξ_i, η_i) and the point (x_j, y_j) on the linear boundary element Γ_j

$$r_{ij} = \sqrt{(r_x^j)^2 + (r_y^j)^2} \quad (12)$$

while:

$$\begin{aligned} r_x^j &= N_p x_p^j + N_k x_k^j - \xi_i \\ r_y^j &= N_p y_p^j + N_k y_k^j - \eta_i \end{aligned} \quad (13)$$

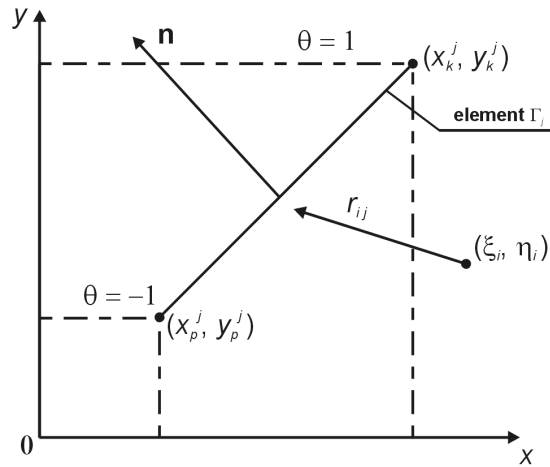


Fig. 2. Linear boundary element

In formulas (11), (13) (x_p^j, y_p^j) , (x_k^j, y_k^j) correspond to the beginning and the end of boundary element Γ_j .

2. Shape sensitivity analysis

We assume that radius R of internal hole is the shape parameter (Fig. 1). The implicit differentiation method [3] of sensitivity analysis starts with the algebraic system of equations (2). The differentiation of (2) with respect to R leads to the following system of equations

$$\frac{D\mathbf{G}}{DR} \mathbf{q} + \mathbf{G} \frac{D\mathbf{q}}{DR} = \frac{D\mathbf{H}}{DR} \mathbf{T} + \mathbf{H} \frac{D\mathbf{T}}{DR} \quad (14)$$

This approach of shape sensitivity analysis requires the differentiation of elements of matrices \mathbf{G} and \mathbf{H} , this means the differentiation of \mathbf{G}^p , \mathbf{G}^k , \mathbf{H}^p , \mathbf{H}^k (c.f. equa-

tions (5), (6), (7), (8)) with respect to the R . Non-zero elements of these matrices are connected with:

- 1) the integrals over the boundary elements approximating the internal circle,
- 2) the integrals over the boundary elements approximating the external boundary of the domain considered for which the observation point (ξ_i, η_i) belongs to the circle.

In the first case each point on the linear boundary element Γ_j can be expressed as follows

$$(x, y) \in \Gamma_j : \begin{cases} x = N_p (x_s + R \cos \varphi_p^j) + N_k (x_s + R \cos \varphi_k^j) \\ y = N_p (y_s + R \sin \varphi_p^j) + N_k (y_s + R \sin \varphi_k^j) \end{cases} \quad (15)$$

It is easy to check that (c.f. equation (11)):

$$\begin{aligned} l_x^j &= x_k^j - x_p^j = R (\cos \varphi_k^j - \cos \varphi_p^j) \\ l_y^j &= y_k^j - y_p^j = R (\sin \varphi_k^j - \sin \varphi_p^j) \end{aligned} \quad (16)$$

and then

$$\frac{\partial l_j}{\partial R} = \frac{1}{l_j} \left(l_x^j \frac{\partial l_x^j}{\partial R} + l_y^j \frac{\partial l_y^j}{\partial R} \right) \quad (17)$$

where:

$$\begin{aligned} \frac{\partial l_x^j}{\partial R} &= \cos \varphi_k^j - \cos \varphi_p^j \\ \frac{\partial l_y^j}{\partial R} &= \sin \varphi_k^j - \sin \varphi_p^j \end{aligned} \quad (18)$$

The formulas (13) take the following form:

$$\begin{aligned} r_x^j &= (N_p - \delta_1) (x_s + R \cos \varphi_p^j) + (N_k - \delta_2) (x_s + R \cos \varphi_k^j) - \\ &\quad \delta_3 (x_s + R \cos \varphi_i) - \delta_4 \xi_i \\ r_y^j &= (N_p - \delta_1) (y_s + R \sin \varphi_p^j) + (N_k - \delta_2) (y_s + R \sin \varphi_k^j) - \\ &\quad \delta_3 (y_s + R \sin \varphi_i) - \delta_4 \eta_i \end{aligned} \quad (19)$$

where:

- if the observation point $(\xi_i, \eta_i) = (x_p^j, y_p^j)$ then $\delta_1 = 1, \delta_2 = 0, \delta_3 = 0, \delta_4 = 0,$
- if the observation point $(\xi_i, \eta_i) = (x_k^j, y_k^j)$ then $\delta_1 = 0, \delta_2 = 1, \delta_3 = 0, \delta_4 = 0,$

- if the observation point (ξ_i, η_i) belongs to the circle but $(\xi_i, \eta_i) \neq (x_p^j, y_p^j)$ and $(\xi_i, \eta_i) \neq (x_k^j, y_k^j)$ then $\delta_1 = 0, \delta_2 = 0, \delta_3 = 1, \delta_4 = 0,$
- if the observation point (ξ_i, η_i) not belongs to the circle then $\delta_1 = 0, \delta_2 = 0, \delta_3 = 0, \delta_4 = 1.$

We calculate:

$$\begin{aligned} \frac{\partial r_x^j}{\partial R} &= (N_p - \delta_1) \cos \varphi_p^j + (N_k - \delta_2) \cos \varphi_k^j - \delta_3 \cos \varphi_i \\ \frac{\partial r_y^j}{\partial R} &= (N_p - \delta_1) \sin \varphi_p^j + (N_k - \delta_2) \sin \varphi_k^j - \delta_3 \sin \varphi_i \end{aligned} \quad (20)$$

and then (c.f. equations (5), (6))

$$\begin{aligned} \frac{\partial G_{ij}^p}{\partial R} &= \frac{1}{4 \pi \lambda} \frac{\partial I_j}{\partial R} \int_{-1}^1 N_p \ln \frac{1}{r_{ij}} d\theta + \\ &\quad \frac{I_j}{4 \pi \lambda} \int_{-1}^1 N_p \frac{\partial}{\partial R} \left(\ln \frac{1}{r_{ij}} \right) d\theta \end{aligned} \quad (21)$$

$$\begin{aligned} \frac{\partial G_{ij}^k}{\partial R} &= \frac{1}{4 \pi \lambda} \frac{\partial I_j}{\partial R} \int_{-1}^1 N_k \ln \frac{1}{r_{ij}} d\theta + \\ &\quad \frac{I_j}{4 \pi \lambda} \int_{-1}^1 N_k \frac{\partial}{\partial R} \left(\ln \frac{1}{r_{ij}} \right) d\theta \end{aligned} \quad (22)$$

where

$$\frac{\partial}{\partial R} \left(\ln \frac{1}{r_{ij}} \right) = -\frac{1}{r_{ij}^2} \left(r_x^j \frac{\partial r_x^j}{\partial R} + r_y^j \frac{\partial r_y^j}{\partial R} \right) \quad (23)$$

In similar way the formulas (7), (8) are differentiated:

$$\frac{\partial \hat{H}_{ij}^p}{\partial R} = \frac{1}{4\pi} \int_{-1}^1 N_p \frac{\partial}{\partial R} \left(\frac{r_x^j I_y^j - r_y^j I_x^j}{r_{ij}^2} \right) d\theta \quad (24)$$

$$\frac{\partial \hat{H}_{ij}^k}{\partial R} = \frac{1}{4\pi} \int_{-1}^1 N_k \frac{\partial}{\partial R} \left(\frac{r_x^j I_y^j - r_y^j I_x^j}{r_{ij}^2} \right) d\theta \quad (25)$$

where

$$\begin{aligned} & \frac{\partial}{\partial R} \left(\frac{r_x^j l_y^j - r_y^j l_x^j}{r_{ij}^2} \right) = \\ & \frac{\left(\frac{\partial r_x^j}{\partial R} l_y^j + r_x^j \frac{\partial l_y^j}{\partial R} - \frac{\partial r_y^j}{\partial R} l_x^j - r_y^j \frac{\partial l_x^j}{\partial R} \right)}{r_{ij}^2} - \\ & \frac{2 \left(r_x^j \frac{\partial r_x^j}{\partial R} + r_y^j \frac{\partial r_y^j}{\partial R} \right) (r_x^j l_y^j - r_y^j l_x^j)}{r_{ij}^4} \end{aligned} \quad (26)$$

In the second case for the integrals over the boundary elements approximating the external boundary of the domain considered for which the observation point (ξ_i, η_i) belongs to the circle we have

$$(x, y) \in \Gamma_j : \begin{cases} x = N_p x_p^j + N_k x_k^j \\ y = N_p y_p^j + N_k y_k^j \end{cases} \quad (27)$$

and then

$$\frac{\partial l_x^j}{\partial R} = 0, \quad \frac{\partial l_y^j}{\partial R} = 0, \quad \frac{\partial l^j}{\partial R} = 0 \quad (28)$$

while:

$$\begin{aligned} r_x^j &= N_p x_p^j + N_k x_k^j - (x_s + R \cos \varphi_i) \\ r_y^j &= N_p y_p^j + N_k y_k^j - (y_s + R \sin \varphi_i) \end{aligned} \quad (29)$$

from which:

$$\begin{aligned} \frac{\partial r_x^j}{\partial R} &= -\cos \varphi_i \\ \frac{\partial r_y^j}{\partial R} &= -\sin \varphi_i \end{aligned} \quad (30)$$

The next part of the algorithm is similar as for the first case.

3. Example of computations

The square of dimensions 0.05×0.05 m is considered - Figure 3. The center of the circle: $x_s = 0.025$, $y_s = 0.025$, radius: $R = 0.015$ m.

It is assumed that $\lambda = 1 \text{ W/(mK)}$. On the bottom external boundary the Neumann condition $q_b = -10^4 \text{ W/m}^2$ is accepted, on the remaining part of the external boundary the Dirichlet condition $T_{b1} = 500^\circ\text{C}$ is assumed. Along the circle the constant temperature $T_{b2} = 700^\circ\text{C}$ is given.

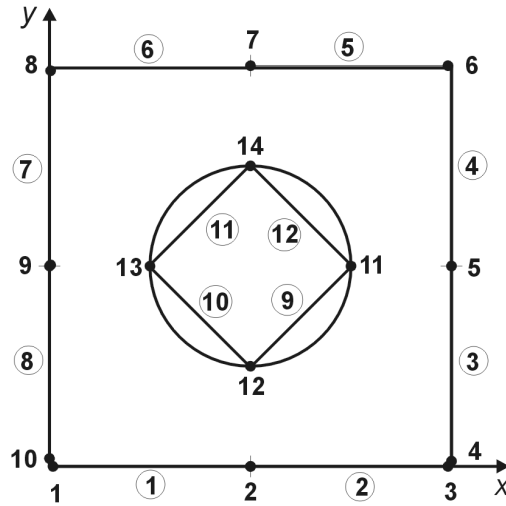


Fig. 3. Discretization

The solution of the basic problem is following

$$\mathbf{T} = \begin{bmatrix} 500 \\ 782.8393 \\ 500 \\ 500 \\ 500 \\ 500 \\ 500 \\ 500 \\ 500 \\ 500 \\ 500 \\ 700 \\ 700 \\ 700 \\ 700 \end{bmatrix}, \quad \mathbf{q} = \begin{bmatrix} -10000 \\ -10000 \\ -10000 \\ 24921.71 \\ 755.35 \\ 866.37 \\ 18728.08 \\ 866.37 \\ 15755.35 \\ 24921.71 \\ -26304.01 \\ 7567.95 \\ -26304.01 \\ -22200.60 \end{bmatrix} \quad (31)$$

while the solution of the additional problem connected with the sensitivity analysis

$$\frac{DT}{DR} = \begin{bmatrix} 0 \\ 625.6518 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}, \quad \frac{Dq}{DR} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ -109018.34 \\ 1942096.95 \\ -12163.03 \\ 2136038.29 \\ -12163.03 \\ 1942096.95 \\ -109018.34 \\ -1555703.65 \\ 1492900.51 \\ -1555703.65 \\ -830258.69 \end{bmatrix} \quad (32)$$

Using the expansion of function T into the Taylor series

$$T(R + \Delta R) = T(R) + \frac{DT(R)}{DR} \Delta R \quad (33)$$

we can estimate the change of temperature due to the change of R . For example, if $\Delta R = 0.1R$ then the temperature at the node 2 (Fig. 3) changes from 782.8393 to $782.8393 + 625.6518 \cdot 0.0015 = 783.7778$.

References

- [1] Brebbia C.A., Domingues J., Boundary elements, an introductory course, CMP, McGraw-Hill Book Company, London 1992.
- [2] Majchrzak E., Boundary element method in heat transfer, Publ. of the Techn. Univ. of Czest., Czestochowa 2001 (in Polish).
- [3] Burczyński T., Sensitivity analysis, optimization and inverse problems, (in:) Boundary element advances in solid mechanics, Springer-Verlag, Wine, New York 2004.