

SENSITIVITY ANALYSIS OF BIOHEAT TRANSFER IN HUMAN CORNEA SUBJECTED TO LASER IRRADIATION. PART 2: SHAPE VARIATION

Marek Jasiński

Silesian University of Technology, Gliwice, Poland, marek.jasinski@polsl.pl

Abstract. The paper is continuation of part 1, in which the sensitivity analysis with regard to the thermophysical and optic parameters of human cornea have been discussed. Numerical analysis of thermal processes proceeding in the domain of human cornea subjected to laser irradiation is presented. Heat transfer in the tissue domain was assumed to be transient and one-dimensional. The internal heat sources resulting from laser irradiation based on the Beer law are taken into account. The paper deals with sensitivity analysis of temperature field with respect to the geometrical parameters of cornea. At the stage of numerical computations the boundary element method has been used. In the final part of paper the results of computations are presented.

1. Material derivative

In order to discuss shape sensitivity analysis the concept of material derivative has been applied. Using this concept we can write [1-3]

$$\frac{DT}{Db_s} = \frac{\partial T}{\partial b_s} + T_{,i}v^s \quad (1)$$

where $v^s = v^s(x, b_s)$ is the velocity associated with design parameter b_s . In the current analysis is assumed that $b_0 = L_0$ and $b_1 = L_1$, where L_0 and L_1 correspond to the external (anterior) and internal (posterior) surface of cornea.

Because (c.f. equation (1))

$$\frac{DT_{,i}}{Db_s} = \frac{\partial T_{,i}}{\partial b_s} + T_{,ii}v^s = \left(\frac{\partial T}{\partial b_s} \right)_{,i} + T_{,ii}v^s \quad (2)$$

and

$$\left(\frac{DT}{Db_s} \right)_{,i} = \left(\frac{\partial T}{\partial b_s} + T_{,i}v^s \right)_{,i} = \left(\frac{\partial T}{\partial b_s} \right)_{,i} + T_{,ii}v^s + T_{,i}v^s_{,i} \quad (3)$$

therefore

$$\left(\frac{DT}{Db_s}\right) = \left(\frac{\partial T}{\partial b_s}\right)_i + T_{,i}v_{,i}^s \quad (4)$$

In similar way one obtains

$$\frac{D\dot{T}}{Db_s} = \frac{\partial}{\partial t} \left(\frac{DT}{Db_s}\right) \quad (5)$$

Using formula (4) we have

$$\frac{DT_{,ii}}{Db_s} = \frac{D[(T_{,i})_{,i}]}{Db_s} = \left(\frac{DT_{,i}}{Db_s}\right)_{,i} - T_{,ii}v_{,i}^s \quad (6)$$

and next

$$\frac{DT_{,ii}}{Db_s} = \left[\left(\frac{DT}{Db_s}\right)_{,i} - T_{,i}v_{,i}^s \right]_{,i} - T_{,ii}v_{,i}^s = \left(\frac{DT}{Db_s}\right)_{,ii} - 2T_{,ii}v_{,i}^s - T_{,i}v_{,ii}^s \quad (7)$$

2. Shape sensitivity analysis - direct approach

If the direct approach of sensitivity method is applied then the Pennes equation [4-9] and the boundary initial conditions (see chapter: Governing equations in Part 1) are differentiated with respect to parameter b_s [8, 9].

Taking into account the bioheat transfer equation one has

$$x \in \Omega: c \frac{D\dot{T}}{Db_s} = \lambda \frac{DT_{,ii}}{Db_s} + \frac{DQ_{las}}{Db_s} \quad (8)$$

Let assume that

$$U^s = \frac{DT}{Db_s}, \quad \dot{U}^s = \frac{\partial U^s}{\partial t}, \quad U_{,ii}^s = \frac{DT_{,ii}}{Db_s} \quad (9)$$

Taking into account the formulas (4), (5), (7) one has

$$c\dot{U}^s = \lambda [U_{,ii}^s - 2T_{,ii}v_{,i}^s - T_{,i}v_{,ii}^s] + \frac{DQ_{las}}{Db_s} \quad (10)$$

From the Pennes equation (see equation (1) in Part 1) results that

$$\lambda T_{,ii} = c\dot{T} - Q_{las} \quad (11)$$

So the equation (10) takes a form

$$c\dot{U}^s = \lambda U_{,ii}^s - 2[c\dot{T} - Q_{las}]v_{,i}^s - \lambda T_{,i}v_{,ii}^s + \frac{DQ_{las}}{Db_s} \quad (12)$$

The last component of the equation (12) can be expressed as

$$\frac{DQ_{las}}{Db_s} = \frac{\partial Q_{las}}{\partial b_s} + Q_{las,i}v^s \quad (13)$$

Taking into account a form of laser heat source (see equation (3) in Part 1) one has

$$Q_{las,i} = [\mu_a I_0 \exp(-\mu_a x)]_{,i} = -\mu_a^2 I_0 \exp(-\mu_a x) \quad (14)$$

and

$$\frac{\partial Q_{las}}{\partial b_s} = \frac{\partial}{\partial b_s} [\mu_a I_0 \exp(-\mu_a x)] = -\mu_a^2 I_0 \exp(-\mu_a x) \frac{\partial x}{\partial b_s} = Q_{las,i} \frac{\partial x}{\partial b_s} \quad (15)$$

Using equations (14) and (15) one obtains

$$\frac{DQ_{las}}{Db_s} = Q_{las,i} \left(\frac{\partial x}{\partial b_s} + v^s \right) \quad (16)$$

We can write the final form of equation (12) as [5, 6]

$$c\dot{U}^s = \lambda U_{,ii}^s + Q_V^s \quad (17)$$

where a sensitivity source function Q_V^s is defined as

$$Q_V^s = -2[c\dot{T} - \mu_a I_0 \exp(-\mu_a x)]v_{,i}^s - \lambda T_{,i}v_{,ii}^s - \mu_a^2 I_0 \exp(-\mu_a x) \left(\frac{\partial x}{\partial b_s} + v^s \right) \quad (18)$$

Differentiating the boundary conditions on the anterior (external) surface of cornea we obtain (see equation (4) in Part 1)

$$x = L_0 : -\lambda \frac{DT_{,i}}{Db_s} = \alpha \frac{DT}{Db_s} + \varepsilon \sigma \frac{D(T^4)}{Db_s} \quad (19)$$

or (c. f. equation (4))

$$x = L_0: \quad -\lambda[U_{,i}^s + T_{,i}v_{,i}^s] = \alpha U^s + 4\varepsilon\sigma T^3 U^s \quad (20)$$

and finally

$$x = L_0: \quad Q^s = \alpha U^s + 4\varepsilon\sigma T^3 U^s + qv_{,i}^s \quad (21)$$

In similar way, the boundary condition on the posterior (internal) surface of cornea is differentiated

$$x = L_1: \quad Q^s(x, t) = Q_1^s = q_1 v_{,i}^s \quad (22)$$

It should be pointed out that in equations (21) and (22) Q^s is defined as [8, 9]

$$Q^s = -\lambda U_{,i}^s n_i \quad (23)$$

To obtain form of initial condition once more the material derivative is used (c.f. equation (1)) [8, 9]

$$\frac{DT_p}{Db_s} = \frac{\partial T_p}{\partial b_s} + T_{p,i} v_{,i}^s \quad (24)$$

and next

$$t = 0: \quad U_p^s = T_{p,i} v_{,i}^s \quad (25)$$

It should be pointed out that velocities associated with design parameters are defined as [1, 2, 8, 9]

$$x \in \Omega: \quad \begin{cases} v^0(x, b_s) = \frac{L_1 - x}{L_1 - b_s}, & b_s = L_0 \\ v^1(x, b_s) = \frac{x - L_0}{b_s - L_0}, & b_s = L_1 \end{cases} \quad (26)$$

so their derivatives are

$$v_{,i}^0 = \frac{-1}{L_1 - b_0}, \quad v_{,ii}^0 = 0 \quad (27)$$

and

$$v_{,i}^1 = \frac{1}{b_1 - L_0}, \quad v_{,ii}^1 = 0 \quad (28)$$

3. Results of computations

As in Part 1, the 1D task has been taken into account, and at the stage of numerical computations the 1st scheme of boundary element method has been applied [10]. The BEM has been used both to calculate the temperatures field and sensitivities functions of design parameters L_0 and L_1 . All data has been assumed the same as previously in Part 1.

In Figures 1 and 2 the sensitivities functions of investigated parameters are presented. In both cases sensitivity values are multiplied by $\Delta L_0 = \Delta L_1 = 0.6 \mu\text{m}$.

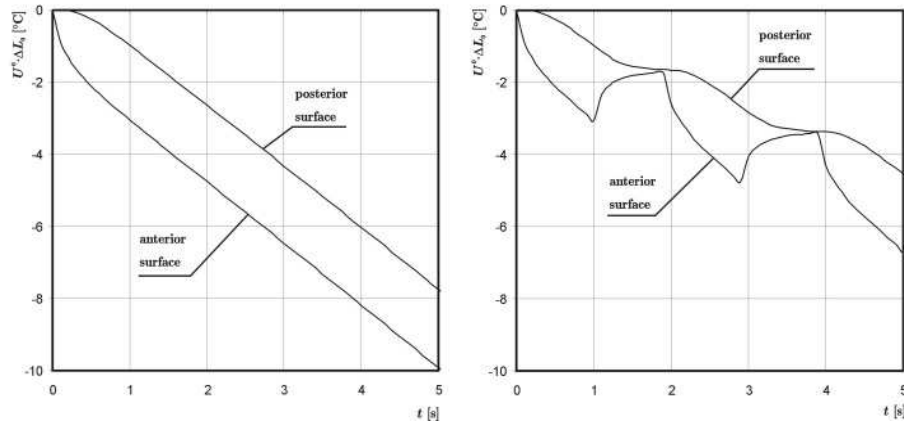


Fig. 1. Course of sensitivity function for design parameter L_0

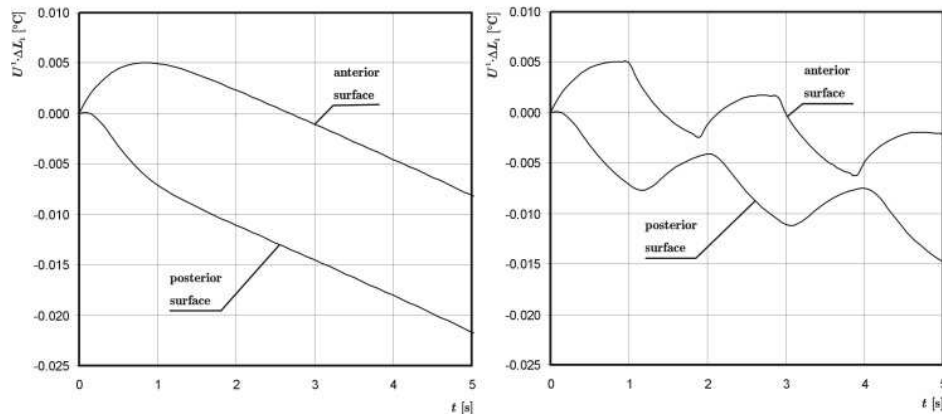


Fig. 2. Course of sensitivity function for design parameter L_1

Final remarks

The sensitivity studies show that the greatest influence on temperature has the change of L_0 (Fig. 1). After 5 seconds the changes are up to -10°C on the anterior

(external) surface of cornea and about -7°C on the posterior (internal) surface (for constant irradiation). For time-varying irradiation the changes of temperature are about -6°C and -4°C , respectively.

In the case of variation of L_1 (Fig. 2) corresponding to internal surface of cornea the differences are much smaller, but still visible. For constant irradiation they are from the scope from -0.055 to -0.02°C while for modulated irradiation from -0.015 to -0.002°C .

Similarly to conclusion from Part 1, one can find that also changes of geometrical parameters of cornea have visible effect in temperature level during laser irradiation.

This paper is part of project No N N501 3667 34.

References

- [1] Dems K., Sensitivity analysis in thermal problems - II: structure shape variation, *Journal of Thermal Stresses* 1987, 10, 1-16.
- [2] Dems K., Rousselet B., Sensitivity analysis for transient heat conduction in a solid body - Part 1: External boundary modification, *Structural Optimization* 1999, 17, 36-45.
- [3] Kleiber M., *Parameter sensitivity in nonlinear mechanics*, J. Wiley & Sons, Chichester 1997.
- [4] Mihran R.T., Interaction of laser radiation with structures of the eye, *IEEE Transactions on Education* 1991, 34, 3, 250-259.
- [5] Lembares A., Hu X.H., Kalmus G.W., Absorption spectra of corneas in the far ultraviolet region, *Investigative Ophthalmology and Visual Science* 1997, 38, 6, 1283-1287.
- [6] Amara E.H., Numerical investigations on thermal effects of laser - ocular media interaction, *Int. J. Heat and Mass Transfer* 1995, 38, 13, 2479-2488.
- [7] Welch A.J., The thermal response of laser irradiated tissue, *IEEE Journal of Quantum Electronics* 1984, 20, 12, 1471-1481.
- [8] Majchrzak E., Jasiński M., Kałuza G., Sensitivity analysis of burn integrals with respect to the geometrical parameters of skin, *Computer Methods in Mechanics*, Gliwice/Wisła 2003.
- [9] Majchrzak E., Kałuza G., Modelling of temperature distribution in heating tissue with regard to the shape sensitivity analysis. *Scientific Research of the Institute of Mathematics and Computer Science* 2004, 1(3), 121-126.
- [10] Majchrzak E., *Boundary element method in heat transfer*, Publ. of Czestochowa University of Technology, Czestochowa 2001 (in Polish).