

APPLICATION OF A GREEN'S FUNCTION METHOD TO HEAT CONDUCTION PROBLEMS IN MULTI-LAYERED CYLINDERS

Urszula Siedlecka, Stanisław Kukla

*Institute of Mathematics, Czestochowa University of Technology
Częstochowa, Poland
urszula.siedlecka@im.pcz.pl, stanislaw.kukla@im.pcz.pl*

Abstract. In this paper, the Green's functions which are used in solving the heat conduction problem in a composite cylinder are derived. The functions are obtained by the solution of one-dimensional eigenproblems and are presented in the form of eigenfunction series. The temperature in the cylinder as a function of time and space coordinates are expressed by the Green's functions. A numerical example is presented.

Keywords: *heat conduction, Green's function, composite cylinder*

Introduction

The heat conduction problem in a composite circular cylinder has been considered by Lu et al. in paper [1]. The problem has been solved by applying the Laplace transform and the closed form solution as the real part of a function is given. Likewise, in papers [2, 3], the solution of the heat conduction problem in a cylinder was obtained by using the Laplace transform. The inverse transform has been numerically determined. However, the numerical computations of the inverse transform often leads to numerical instabilities and for this reason the seeking of new methods is purposeful. The other approach to solving the problem is the use of the properties of Green's functions which correspond to the initial boundary problem of heat conduction in the layers of the considered composite cylinder. Applications of the Green's functions to various problems of heat conduction are presented in the book by Beck et al. [4], in the book by Duffy [5] and in the book by Özişik [6]. The Green's function method to the heat conduction in a composite two-layered cylinder has been applied in reference [7].

In this paper the Green's functions applying in the problems of the heat conduction in finite, composite multi-layered cylinders are derived. The functions are obtained by solving the heat conduction differential equation with homogenous boundary conditions of the second and third kind. An example of application of the Green's functions to the problem of heat conduction in radial direction of a two-layered cylinder is given. The temperature in the cylinder as a time function is numerically computed.

1. Derivation of Green's functions

The Green's functions for the problems of heat conduction satisfy the following differential equation

$$\nabla^2 G - \frac{1}{\alpha} \frac{\partial G}{\partial t} = \frac{1}{r} \delta(r - \rho) \delta(z - \zeta) \delta(t - \tau) \delta(\theta - \varphi) \quad (1)$$

where $\nabla^2 = \frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} + \frac{1}{r^2} \frac{\partial^2}{\partial \theta^2} + \frac{\partial^2}{\partial z^2}$ is the laplacian in cylindrical coordinates, α is the diffusion coefficient, r, θ, z are the space coordinates in cylindrical coordinate system and t is time (Fig. 1).

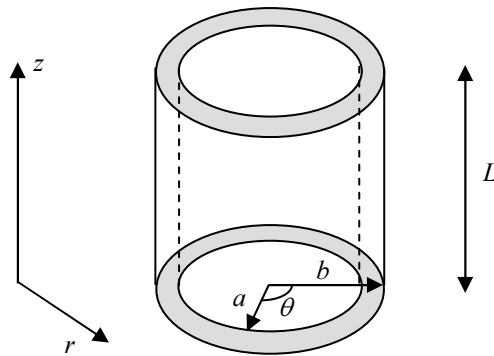


Fig. 1. The sketch of the considered cylindrical region

We assume the homogeneous boundary conditions in the form:

$$a_1 \frac{\partial G}{\partial r} - a_2 G = 0 \text{ for } r = a \quad (2)$$

$$b_1 \frac{\partial G}{\partial r} - b_2 G = 0 \text{ for } r = b \quad (3)$$

$$\gamma_1 \frac{\partial G}{\partial z} - \gamma_2 G = 0 \text{ for } z = 0 \quad (4)$$

$$\nu_1 \frac{\partial G}{\partial z} - \nu_2 G = 0 \text{ for } z = L \quad (5)$$

Moreover, the function zero initial condition held

$$G(0, r, \theta, z; \tau, \rho, \varphi, \zeta) = 0 \quad (6)$$

We search the solution of the initial - boundary problem (1)-(6) in the form

$$G(t, r, \theta, z; \tau, \rho, \varphi, \zeta) = \sum_{n=0}^{\infty} \frac{1}{\kappa_n} g_n(t, r, z; \tau, \rho, \zeta) \cos n(\theta - \varphi) \quad (7)$$

where $\kappa_0 = 2\pi$ and $\kappa_n = \pi$ for $n > 0$. Substituting (7) into equation (1), we obtain differential equation in the form

$$\frac{\partial^2 g_n}{\partial r^2} + \frac{1}{r} \frac{\partial g_n}{\partial r} - \frac{n^2}{r^2} g_n + \frac{\partial^2 g_n}{\partial z^2} - \frac{1}{\alpha} \frac{\partial g_n}{\partial t} = \frac{1}{r} \delta(r - \rho) \delta(z - \zeta) \delta(t - \tau) \quad (8)$$

The function $g_n(t, r, z; \tau, \rho, \zeta)$ can be expressed in the form of the product of two 1D Green's functions [4]

$$g_n(t, r, z; \tau, \rho, \zeta) = R_n(t, r; \tau, \rho) \cdot Z(t, z; \tau, \zeta) \quad (9)$$

The function R_n is a solution of a boundary problem:

$$\left(\frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} - \frac{n^2}{r^2} \right) R_n + \frac{1}{r} \delta(r - \rho) \delta(t - \tau) = \frac{1}{\alpha} \frac{\partial R_n}{\partial t} \quad (10)$$

$$a_1 \frac{\partial R_n}{\partial r} - a_2 R_n = 0 \text{ for } r = a \quad (11)$$

$$b_1 \frac{\partial R_n}{\partial r} - b_2 R_n = 0 \text{ for } r = b \quad (12)$$

while the function Z is a solution of the following boundary problem:

$$\frac{\partial^2 Z}{\partial z^2} + \delta(z - \zeta) \delta(t - \tau) = \frac{1}{\alpha} \frac{\partial Z}{\partial t} \quad (13)$$

$$\gamma_1 \frac{\partial Z}{\partial z} - \gamma_2 Z = 0 \text{ for } z = 0 \quad (14)$$

$$\nu_1 \frac{\partial Z}{\partial z} - \nu_2 Z = 0 \text{ for } z = L \quad (15)$$

We seek the function R_n in the form of a series of eigenfunctions $\phi_{nk}(r)$ of the homogeneous problem corresponding to the boundary problem (10)-(12). The sought functions $\phi_{nk}(r)$ satisfy the equation

$$\left(\frac{\partial^2}{\partial r^2} + \frac{1}{r} \frac{\partial}{\partial r} - \frac{n^2}{r^2} \right) \phi_{nk} = \lambda^2 \phi_{nk} \quad (16)$$

where λ is the separation constant. Moreover, the functions $\phi_{nk}(r)$ satisfy the boundary conditions analogous to the given by equations (11)-(12). We assume the functions ϕ_{nk} in the form

$$\phi_{nk}(r) = A_{12} J_n(\lambda_{nk} r) - A_{11} Y_n(\lambda_{nk} r) \quad (17)$$

where λ_{nk} are roots of the eigenvalue equation

$$A_{11} A_{22} - A_{12} A_{21} = 0 \quad (18)$$

where

$$A_{11} = a_1 \lambda J_n'(\lambda a) - a_2 J_n(\lambda a), \quad A_{12} = a_1 \lambda Y_n'(\lambda a) - a_2 Y_n(\lambda a) \quad (19)$$

$$A_{21} = b_1 \lambda J_n'(\lambda b) - b_2 J_n(\lambda b), \quad A_{22} = b_1 \lambda Y_n'(\lambda b) - b_2 Y_n(\lambda b) \quad (20)$$

The functions ϕ_{nk} for each n , create a sequence of orthogonal functions, i.e. the functions satisfy the condition

$$\int_a^b r \phi_{nk}(r) \phi_{nk'}(r) dr = \begin{cases} 0 & \text{for } k' \neq k \\ N_{nk}^R & \text{for } k' = k \end{cases} \quad (21)$$

where

$$N_{nk}^R = \int_a^b r (\phi_{nk}(r))^2 dr \quad (22)$$

Using the functions ϕ_{nk} , the solution of the problem (10)-(12) can be written in the form

$$R_n(t, r; \tau, \rho) = \sum_{k=1}^{\infty} \frac{\phi_{nk}(r) \phi_{nk}(\rho)}{N_{nk}^R} e^{-\lambda_{nk}^2 \alpha (t-\tau)} \quad (23)$$

Similarly, the solution of the boundary problem (13)-(15) we find in the form

$$Z(t, z; \tau, \zeta) = \sum_{k=1}^{\infty} \frac{\psi_k(z) \psi_k(\zeta)}{N_k^Z} e^{-\beta_k^2 \alpha (t-\tau)} \quad (24)$$

The eigenvalues β_k are the roots of equation

$$(\gamma_1 \nu_2 - \gamma_2 \nu_1) \beta \cos \beta L + (\gamma_1 \nu_1 \beta^2 + \gamma_2 \nu_2) \sin \beta L = 0 \quad (25)$$

and the functions ψ_k have the form

$$\psi_k(z) = \gamma_1 \beta_k \cos \beta_k z + \gamma_2 \sin \beta_k z \tag{26}$$

and

$$N_k^Z = \int_0^L (\psi_k(z))^2 dz \tag{27}$$

Finally, the Green's function $G(t, r, \theta, z; \tau, \rho, \phi, \zeta)$ of the problem (1)-(6) is given by equation (7) where the function $g_n(t, r, z; \tau, \rho, \zeta)$ is expressed by equation (9) and the functions $R_n(t, r; \tau, \rho)$, $Z(t, z; \tau, \zeta)$ are presented by (24) and (25), respectively.

The Green's function for axisymmetric heat conduction problem can be obtained assuming $n = 0$ in an equation (8). That way the Green's function for axisymmetric heat conduction problems has the form

$$G(t, r, z; \tau, \rho, \zeta) = \sum_{k=1}^{\infty} \sum_{l=1}^{\infty} \frac{\phi_{0k}(r) \phi_{0k}(\rho)}{N_{0k}^R} \frac{\psi_l(z) \psi_l(\zeta)}{N_l^Z} e^{(-\lambda_{0k}^2 - \beta_l^2) \alpha(t-\tau)} \tag{28}$$

where ϕ_{0k} , N_{0k}^R , ψ_k , and N_k^Z are given by equations (18), (23), (27) and (28), respectively.

The assumption, that the heat conduction is in the radial direction only, leads to the Green's function in the form

$$\begin{aligned} G(t, r; \tau, \rho) &= \\ &= \sum_{k=1}^{\infty} \frac{(A_{12} J_0(\lambda_{0k} r) - A_{11} Y_0(\lambda_{0k} r))(A_{12} J_0(\lambda_{0k} \rho) - A_{11} Y_0(\lambda_{0k} \rho))}{N_{0k}^R} e^{-\lambda_{0k}^2 \alpha(t-\tau)} \end{aligned} \tag{29}$$

where A_{12} and A_{11} are given by equations (20) for $n = 0$.

2. The Green's functions for the problem of heat conduction in m -layered composite cylinder

To solve the problem of heat conduction in the composite m -layered cylinder by the aid of the GF method, we use the Green's functions satisfying boundary conditions which can be obtained by suitable adoption of the coefficients, occurring in boundary conditions (2)-(5). For example, to observe the heat conduction in the radial direction in a two-layered hollow cylinder ($m = 2$), we assume in boundary

conditions (11)-(12) and in equation (30): $a_1 = \alpha_1$, $a_2 = \alpha_+$, $b_1 = 1$, $b_2 = 0$, $a = r_0$, $b = r_1$, $\alpha = k_1$, to obtain the function G_1 and $a_1 = 1$, $a_2 = 0$, $b_1 = \alpha_2$, $b_2 = \alpha_\infty$, $a = r_1$, $b = r_2$, $\alpha = k_2$, to obtain the function G_2 . The boundary conditions, eigenfunctions ϕ_{0k} , eigenvalue equations and norms of eigenfunctions N_{0k}^R for that problem are presented below:

A. Boundary conditions: $\frac{\partial G_1}{\partial r} - \gamma_0 G_1 = 0$ for $r = r_0$, $\frac{\partial G_1}{\partial r} = 0$ for $r = r_1$ $\left(\gamma_1 = \frac{\alpha_+}{\alpha_1} \right)$

(a) eigenfunctions:

$$\phi_{0k}^{[1]} = J_0(r\lambda_{0k}^{[1]})Y_1(r_1\lambda_{0k}^{[1]}) - Y_0(r\lambda_{0k}^{[1]})J_1(r_1\lambda_{0k}^{[1]}) \quad (30)$$

(b) eigenequation:

$$\begin{aligned} & \left(\lambda_{0k}^{[1]} J_1(r_0\lambda_{0k}^{[1]}) + \gamma_1 J_0(r_0\lambda_{0k}^{[1]}) \right) Y_1(r_1\lambda_{0k}^{[1]}) - \\ & - \left(\lambda_{0k}^{[1]} Y_1(r_0\lambda_{0k}^{[1]}) + \gamma_1 Y_0(r_0\lambda_{0k}^{[1]}) \right) J_1(r_1\lambda_{0k}^{[1]}) = 0 \end{aligned} \quad (31)$$

(c) norms of eigenfunctions:

$$\begin{aligned} N_{0k}^R &= \frac{2}{\pi^2 (\lambda_{0k}^{[1]})^2} - \frac{1}{2} r_0^2 J_1^2(r_1\lambda_{0k}^{[1]}) (Y_0^2(r_0\lambda_{0k}^{[1]}) + Y_1^2(r_0\lambda_{0k}^{[1]})) + \\ & + r_0^2 J_1(r_1\lambda_{0k}^{[1]}) Y_1(r_1\lambda_{0k}^{[1]}) \left[J_0(r_0\lambda_{0k}^{[1]}) Y_0(r_0\lambda_{0k}^{[1]}) + J_1(r_0\lambda_{0k}^{[1]}) Y_1(r_0\lambda_{0k}^{[1]}) \right] - \\ & - \frac{1}{2} r_0^2 (J_0^2(r_0\lambda_{0k}^{[1]}) + J_1^2(r_0\lambda_{0k}^{[1]})) Y_1^2(r_1\lambda_{0k}^{[1]}) \end{aligned} \quad (32)$$

B. Boundary conditions: $\frac{\partial G_i}{\partial r} = 0$ for $r = r_{i-1}$, $\frac{\partial G_i}{\partial r} = 0$ for $r = r_i$, $i = 2, 3, \dots, m-1$

(a) eigenfunctions:

$$\phi_{0k}^{[i]} = J_0(r\lambda_{0k}^{[i]})Y_1(r_i\lambda_{0k}^{[i]}) - Y_0(r\lambda_{0k}^{[i]})J_1(r_i\lambda_{0k}^{[i]}) \quad (33)$$

(b) eigenequation:

$$J_1(r_{i-1}\lambda_{0k}^{[i]})Y_1(r_i\lambda_{0k}^{[i]}) - Y_1(r_{i-1}\lambda_{0k}^{[i]})J_1(r_i\lambda_{0k}^{[i]}) = 0 \quad (34)$$

(c) norms of eigenfunctions:

$$\begin{aligned}
 N_{0k}^R = & \frac{2}{\pi^2 (\lambda_{0k}^{[i]})^2} - \frac{1}{2} r_{i-1}^2 J_1^2(r_i \lambda_{0k}^{[i]}) (Y_0^2(r_{i-1} \lambda_{0k}^{[i]}) + Y_1^2(r_{i-1} \lambda_{0k}^{[i]})) + \\
 & + r_{i-1}^2 J_1(r_i \lambda_{0k}^{[i]}) Y_1(r_i \lambda_{0k}^{[i]}) [J_0(r_{i-1} \lambda_{0k}^{[i]}) Y_0(r_{i-1} \lambda_{0k}^{[i]}) + J_1(r_{i-1} \lambda_{0k}^{[i]}) Y_1(r_{i-1} \lambda_{0k}^{[i]})] - \\
 & - \frac{1}{2} r_{i-1}^2 (J_0^2(r_{i-1} \lambda_{0k}^{[i]}) + J_1^2(r_{i-1} \lambda_{0k}^{[i]})) Y_1^2(r_i \lambda_{0k}^{[i]})
 \end{aligned} \quad (35)$$

C. Boundary conditions: $\frac{\partial G_m}{\partial r} = 0$ for $r = r_{m-1}$, $\frac{\partial G_m}{\partial r} - \gamma_m G_m = 0$ for $r = r_m$ ($\gamma_1 = \frac{\alpha_\infty}{\alpha_m}$)

(a) eigenfunctions:

$$\phi_{0k}^{[m]} = J_0(r \lambda_{0k}^{[m]}) Y_1(r_{m-1} \lambda_{0k}^{[m]}) - Y_0(r \lambda_{0k}^{[m]}) J_1(r_{m-1} \lambda_{0k}^{[m]}) \quad (36)$$

(b) eigenequation:

$$\begin{aligned}
 & (\lambda_{0k}^{[m]} Y_1(r_m \lambda_{0k}^{[m]}) - \gamma_m Y_0(r_m \lambda_{0k}^{[m]})) J_1(r_{m-1} \lambda_{0k}^{[m]}) - \\
 & - (\lambda_{0k}^{[m]} J_1(r_m \lambda_{0k}^{[m]}) - \gamma_m J_0(r_m \lambda_{0k}^{[m]})) Y_1(r_{m-1} \lambda_{0k}^{[m]}) = 0
 \end{aligned} \quad (37)$$

(c) norms of eigenfunctions:

$$\begin{aligned}
 N_{0k}^R = & \frac{2}{\pi^2 (\lambda_{0k}^{[m]})^2} - \frac{1}{2} r_{m-1}^2 J_1^2(r_m \lambda_{0k}^{[m]}) (Y_0^2(r_{m-1} \lambda_{0k}^{[m]}) + Y_1^2(r_{m-1} \lambda_{0k}^{[m]})) + \\
 & + r_{m-1}^2 J_1(r_m \lambda_{0k}^{[m]}) Y_1(r_m \lambda_{0k}^{[m]}) [J_0(r_{m-1} \lambda_{0k}^{[m]}) Y_0(r_{m-1} \lambda_{0k}^{[m]}) + J_1(r_{m-1} \lambda_{0k}^{[m]}) Y_1(r_{m-1} \lambda_{0k}^{[m]})] \\
 & - \frac{1}{2} r_{m-1}^2 (J_0^2(r_{m-1} \lambda_{0k}^{[m]}) + J_1^2(r_{m-1} \lambda_{0k}^{[m]})) Y_1^2(r_m \lambda_{0k}^{[m]})
 \end{aligned} \quad (38)$$

3. Numerical example

We determine the temperature in the two-layered cylinder by using properties of the Green's functions which are derived in the previous section. The temperatures T_1 and T_2 in the cylinder layers, submitted in the paper [7], are given in the form

$$T_1(t, r) = k_1 \int_0^t [r_1 y(\tau) G_1(t, r; \tau, r_1) + r_0 \gamma_1 T_+(\tau) G_1(t, r; \tau, r_0)] d\tau \quad \text{for } r \in [r_0, r_1] \quad (39)$$

$$T_2(t, r) = k_2 \int_0^t \left[r_2 \gamma_2 T_\infty(\tau) G_2(t, r; \tau, r_2) - r_1 \frac{\alpha_1}{\alpha_2} y(\tau) G_2(t, r; \tau, r_1) \right] d\tau \quad \text{for } r \in [r_1, r_2] \quad (40)$$

The function $y(\tau)$ is a solution of the Volterra integral equation of the first kind [7]:

$$\int_0^t K(t, \tau) y(\tau) d\tau = F(t) \quad (41)$$

where

$$K(t, \tau) = k_1 r_1 G_1(t, r_1; \tau, r_1) + k_2 r_1 \frac{\alpha_1}{\alpha_2} G_2(t, r_1; \tau, r_1)$$

and

$$F(t) = \int_0^t [k_2 r_2 \gamma_2 T_\infty(\tau) G_2(t, r_1; \tau, r_2) - k_1 r_0 \gamma_1 T_+(\tau) G_1(t, r_1; \tau, r_0)] d\tau$$

A numerical procedure to solution of the equation (42) is presented in paper [7].

The numerical calculations of the temperatures T_1 and T_2 in the cylinder are performed for the following geometrical and physical data: $r_0 = 0,04$ m, $r_1 = 0,045$ m, $r_2 = 0,06$ m, $k_1 = 7,5 \cdot 10^{-7}$ m²/s, $k_2 = 1,4 \cdot 10^{-6}$ m²/s, $\alpha_1 = 0,08$ W/(m K), $\alpha_2 = 0,04$ W/(m K), $\alpha_+ = 9,0$ W/(m²K), $\alpha_\infty = 20,0$ W/(m²K). Boundary temperatures are assumed as: $T_\infty(t) = 25^\circ\text{C}$, $T_+(t) = 60 + 30 \cos(0,05t)$.

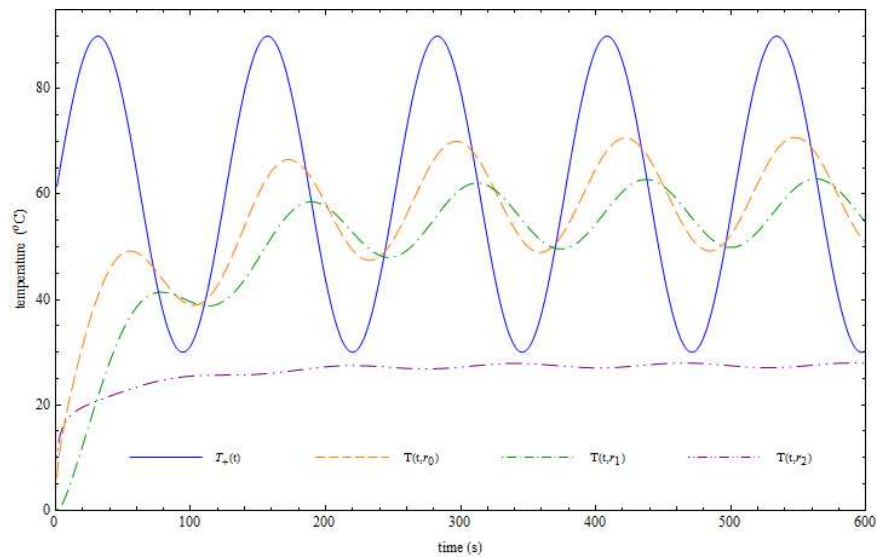


Fig. 2. Variations of the temperature versus time in the inner surroundings of the cylinder and at the points: $r = r_0$, $r = r_1$, $r = r_2$

The time history of temperatures $T(t, r)$ at $r = r_0$, $r = r_1$, $r = r_2$ and temperature $T_+(t)$ for $0 \leq t \leq 600$, is presented in Figure 2. The periodical changes of the

temperature in the cylinder layers are caused by the change of the temperature in the inner surroundings of the cylinder. It can be observed, that temperature at the outer boundary of the cylinder for the used diffusion coefficient, changes slightly over time.

Conclusions

The Green's functions for problems of the heat conduction in a composite hollow cylinder are determined. The functions are presented in the form of eigenfunctions series. There are three cases of boundary conditions considered in the radial direction at the surfaces of the layers and the inner and outer surfaces of the cylinder: Robin-Neumann, Neumann-Neumann and Neumann-Robin conditions. The temperature in the layers of the cylinder with aid of the Green's functions in an analytical form is expressed. Assuming a periodic change of the temperature in the inner surroundings of the cylinder and a constant temperature in the outer surroundings, variations of the temperature versus time in the two-layered cylinder is numerically determined. Although the numerical computation deals with the two-layered cylinder, the presented solution can be used in numerical simulation of the temperature in the multi-layered cylinder.

References

- [1] Lu X., Tervola P., Viljanen M., Transient analytical solution to heat conduction in composite circular cylinder, *International Journal of Heat and Mass Transfer* 2006, 49, 341-348.
- [2] Nezhad Y.R., Asemi K., Akhlaghi M., Transient solution of temperature field in functionally graded hollow cylinder with finite length using multi-layered approach, *International Journal of Mechanics and Materials in Design* 2011, 7, 71-82.
- [3] Garbai L., Kroppe J., Mehes S., Bartal I., Transient heat conduction in composite systems, *Proceedings of the 4th WSEAS International Conference on Heat Transfer, Thermal Engineering and Environment*, Elounda, Greece, August 21-23, 2006, 372-379.
- [4] Beck J.V., Cole K.D., Haji-Sheikh A., Litkouhi B., *Heat Conduction Using Green's Functions*, Hemisphere, Washington, DC 1992.
- [5] Duffy D.G., *Green's functions with applications*, Chapman&Hall/CRC, Washington, DC 2001.
- [6] Özisik M.N., *Heat conduction*, second edition, John Wiley & Sons, New York 1993.
- [7] Kukla S., Siedlecka U., Heat conduction in a two-layered hollow cylinder by Green's function method, *Journal of Applied Mathematics and Computational Mechanics* 2013, 12(2), 45-50.
- [8] Grzymkowski R., Hetmaniok E., Słota D., *Wykłady z modelowania matematycznego*, Wydawnictwo Pracowni Komputerowej Jacka Skalmierskiego, Gliwice 2002.
- [9] Wolfram S., *The Mathematica Book*, Wolfram Media, 5th ed., 2003.